

Living in a healthy Home Environment.

You can breathe deeply with us.



STAR PORCELANO

'Beyond Borders. Beyond Limits.'



W 200X1200MM
OODEN
PLANKS TILES



STAR PORSELANO

"Beyond Borders, Beyond Limits."

just
WOOD *it*

200 x 1200 mm



AKASA WOOD





200X1200MM
WOODEN
PLANKS TILES



AKASA WOOD



AMBER WOOD





W 200X1200MM
OODEN
PLANKS TILES



AMBER WOOD



ARTOS WOOD



SUITABLE FOR
WALL & FLOOR



ANTI-SLIP FINISH
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING



200X1200MM
WOODEN
PLANKS TILES



ARTOS WOOD



FIRE WOOD



WOODEN 200X1200MM
PLANKS TILES



FIRE WOOD



LISA WOOD



WOODEN 200X1200MM
PLANKS TILES



LISA WOOD



MAPLE WOOD





W 200X1200MM
WOODEN
PLANKS TILES



MAPLE WOOD



MORAL WOOD



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

200X1200MM
WOODEN
PLANKS TILES



MORAL WOOD



POPLUR WOOD



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



POPLUR WOOD



RENKOSA WOOD



SUITABLE FOR
WALL & FLOOR



ANTI-SLIP FINISH
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



RENKOSA WOOD



TATAMI WOOD



SUITABLE FOR
WALL & FLOOR



ANTI-SLIP FINISH
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



TATAMI WOOD



VENICE WOOD



SUITABLE FOR
WALL & FLOOR



ANTI-SLIP FINISH
TILES



RANDOM
PATTERN




USE GROUTING FOR
BETTER LAYING

W 200X1200MM
WOODEN
PLANKS TILES



VENICE WOOD

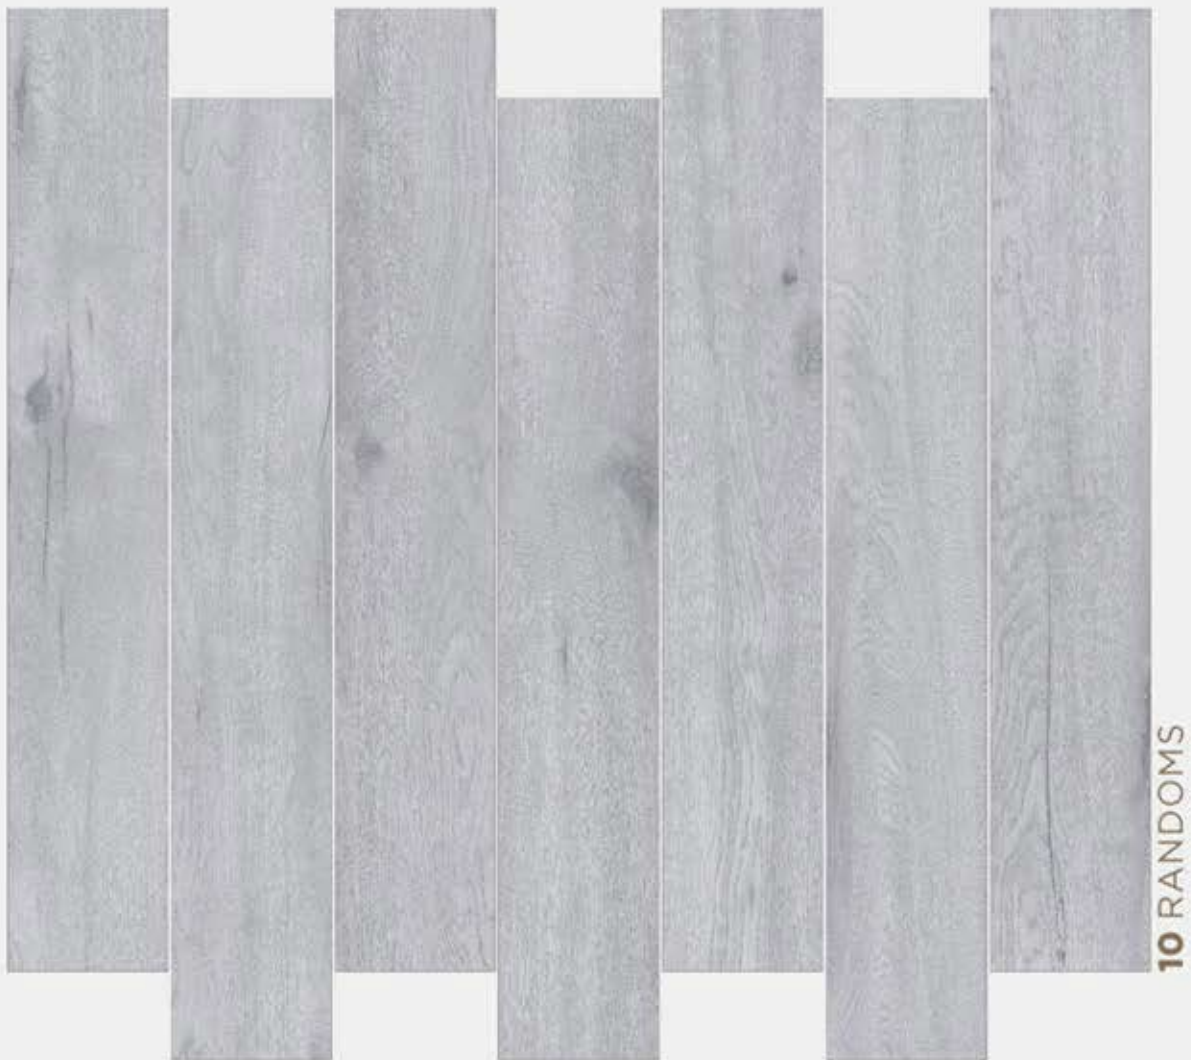

ASH WOOD



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHED
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



ASH WOOD



AZORA WOOD



200X1200MM
WOODEN
PLANKS TILES



AZORA WOOD



BAISA WOOD



SUITABLE FOR
WALL & FLOOR



ANTI-SLIP FINISH
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



BAISA WOOD



BEECH WOOD



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



BEECH WOOD



CELTIS WOOD



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



CELTIS WOOD



CONITER WOOD



SUITABLE FOR
WALL & FLOOR



ANTI-SLIP FINISH
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



CONITER WOOD



DAHOMA WOOD



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



DAHOMA WOOD



DANTA WOOD



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

WOODEN 200X1200MM
PLANKS TILES



DANTA WOOD



IROKA WOOD



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

200X1200MM
WOODEN
PLANKS TILES



IROKA WOOD



LATTE WOOD



SUITABLE FOR
WALL & FLOOR



BRIGHT FINISHING
TILES



RANDOM
PATTERN



USE GROUTING FOR
BETTER LAYING

200X1200MM
WOODEN
PLANKS TILES



LATTE WOOD



STAR PORCELANO
Beyond Borders. Beyond Limits.

WOOD PLANK LAYING PATTERNS



Brick Pattern



Standard Block Pattern



Diagonal Block Pattern



Basketweave Pattern



Diagonal Basket Pattern



Square Basket Pattern



Single Herringbone Pattern



Double Herringbone Pattern



Diagonal Herringbone Pattern



Haddon Hall Pattern



Chevron Pattern



Monticello Pattern

TECHNICAL SPECIFICATION

Sr No.	CHARACTERISTICS	ISO TEST METHODS	VITRIFIED TILES REQUIREMENT AS PER ISO 13006 B1a / EN176 B1a	VITRIFIED TILES IS 15622 : 2006 GROUP B1a	VALUE
A Dimension & Surface Quality					
1	Deviation in Length & Width	ISO 10545-2	+/- 0.6 %	+/- 0.1 %	+/- 0.1 %
2	Deviation in Thickness	ISO 10545-2	+/- 5.0 %	+/- 4.0 %	+/- 3.5 %
3	Straightness of sides	ISO 10545-2	+/- 0.5 %	+/- 0.1 %	+/- 0.08 %
4	Rectangularity	ISO 10545-2	+/- 0.6 %	+/- 0.1 %	+/- 0.1 %
5	Surface Flatness	ISO 10545-2	+/- 0.5 %	+/- 0.2 %	+/- 0.2 %
6	Color Difference	ISO 10545-2	Unaltered	Unaltered	No Change
B Physical Properties					
1	Water Absorption	ISO 10545-3	≤ 0.5%	≤ 0.08%	0.05%
2	Flexural Strength (MOR)	ISO 10545-4	≥ 35 N mm ²	≥ 44 N mm ²	44
3	Mohs Hardness	EN 101	≥ 6	≥ 6	7
4	Flexural Breaking Strength	ISO 10545-4	> 1300 N	> 1500 N	1900 N
5	Bulk Density (GM/CC)	DIN 51082	> 2 gm/cc	> 2.2 gm/cc	2.35 gm/cc
6	Slip Resistance Coefficient of Friction	ISO 10545-17	≥ 0.4	≥ 0.4	≥ 0.6
C Chemical Properties					
1	Staining Resistance	ISO 10545-14	Resistant	Resistant	Resistant
2	Household Chemicals	ISO 10545-13	No Damage	No Damage	No Damage
D Thermal Properties					
1	Thermal Shock Resistance	ISO 10545-9	No Damage	No Damage	Passed
2	Thermal Expansion	ISO 10545-8	9x10 ⁻⁴ Max.	9x10 ⁻⁴ - k ⁻¹ Max.	Passed
3	Moisture Expansion	ISO 10545-10	Nil	Nil	Passed

PACKING DETAILS

TILE SIZE	NO. OF TILES / BOX	WEIGHT / BOX (approx)	COVERAGE AREA / BOX (approx)	COVERAGE AREA / BOX (approx)
200x1200mm	5 pcs.	25.5 kg.	1.20 sq. mtr.	12.92 sq. ft.

Note:

Colour Shown are as accurate as the limitations of the printing process will allow. Prospective customers are advised to inspect a sample of the tile before ordering. Every effort has been made to ensure the accuracy of the information given. However, the company reserves the right to change the specifications without prior notice. Sometimes variations in shade or size being inherent to ceramic industry may occur. Before fixing, we advise you to follow the fixing instructions on the cartons of the tiles as no responsibility can be accepted by the company once the tiles have been fixed.



STAR PORSELANO

"Beyond Borders, Beyond Limits."